CERTECHS

Behind Better Hospitality

TECNODOM spa

PRODUCT OVERVIEW

NERONE 595

TECNODOM · Digital convection oven · 4 trays



Digital convection oven for 4 trays 435 × 350 mm

Compact electric oven for bakery, pastry and gastronomy, with memory for 9 recipes.

NERONE 595 Digital adalah oven konveksi listrik 4 tray dengan kontrol digital. Dua kipas dengan pembalikan arah putaran meratakan panas di ruang masak stainless steel bersudut bulat, cocok untuk roti, pastry, pizza, daging, ikan dan snack.
Suhu, waktu masak dan preheating diatur lewat display digital dengan memori 9 resep. Pintu kaca tempered low emissivity, kaca dalam bisa dibuka untuk dibersihkan, dan lampu halogen menerangi ruang masak.

4	2	9	3,35 kW
TRAY 435 × 350 MM	KIPAS KONVEKSI	MEMORI RESEP	DAYA LISTRIK

DIGITAL CONTROL

Digital display for temperature, cooking time and preheating, with memory for 9 recipes.

TWO REVERSING FANS


Two fans with reverse rotation spread the heat evenly over all 4 levels.

4 TRAYS


4 pans or grids 435 × 350 mm or 450 × 325 mm, 84 mm between levels.

EASY CLEANING


Stainless chamber with rounded corners and an openable inner glass on the cool door.



FOLDING GLASS DOOR



TWO FANS



DIGITAL CONTROL PANEL



MAIN SWITCH

APLIKASI: Bakery, Pastry, Cafe, Bistro, Restaurant, Hotel, Catering

CERTECHS

Behind Better Hospitality

TECNODOM spa

TECHNICAL SPECIFICATION


NERONE 595

TECNODOM CONVECTION OVEN

SPESIFIKASI TEKNIS

Model	**NERONE 595 Digital**
Kode	**FED04NE595V**
Tipe	**Oven konveksi listrik, kontrol digital**
Kapasitas	**4 tray atau grid 435 × 350 mm / 450 × 325 mm**
Jarak antar tray	**84 mm**
Ruang masak L × D × H	**464 × 420 × 370 mm**
Kontrol	**Display digital, memori 9 resep**
Fungsi	**Konveksi, pembalikan arah kipas, lampu, preheating**
Pintu	**Pintu lipat, kaca tempered low emissivity**
Proteksi	**IPX3**
Listrik	**3,35 kW · 220 hingga 240 V · 1 phase · 50/60 Hz**
Berat bersih	**33 kg**
Dimensi L × D × H	**589 × 660 × 580 mm**

W×D×H DIMENSI NOMINAL

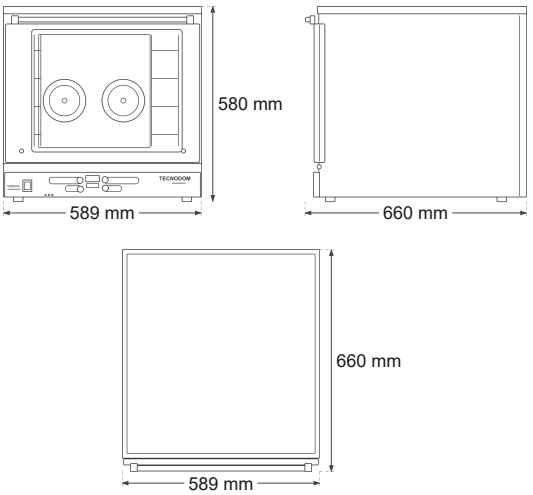

STANDARD SET UP

Folding door as standard, right or left hinged door on request

Interlocking gasket fixing system

Openable inner glass on the cool door

Stainless steel chamber, roof and fans

High resistance hinges, non slip feet, halogen lighting

KONEKSI UTILITAS

Daya listrik	3,35 kW	1 phase
Tegangan	220 hingga 240 V	50/60 Hz